



# Overhead Ionizing Blower

## AEROSTAT<sup>®</sup> GUARDIAN

Simco-Ion's Aerostat Guardian Overhead Ionizing Blower provides superior static charge decay over an entire work surface area. Equipped with task lighting and an integrated heater, the Guardian offers user-friendly operation while effectively protecting sensitive components from ESD damage.

Featuring Simco-Ion's patented inherent balance and built-in emitter point cleaners, the Guardian is the lowest maintenance overhead ionizer available. Like Simco-Ion's other Aerostat series ionizing air blowers, the Guardian operates on AC technology to provide stable balance performance over long periods of use. It is available with airflow diffusers for superior static charge decay efficiency over a large work surface area. Without diffusers, the Guardian provides fast charge decay directly under the unit for targeted work surface coverage.

### Features



- Inherently balanced to  $0 \pm 5V$
- Integrated heater and task lights
- AC technology
- Ionization light
- Integrated emitter point cleaner

### Benefits

- Protects even the most sensitive electronic components
- User-friendly—enhances operator comfort and efficiency
- Stable balance over extended periods of use
- Verifies that the unit is ionizing
- Easy to maintain



## Specifications

<b>Input Voltage</b>	120 VAC, 60 Hz, 0.5A (fan low, heater/light off); 2.5A (fan high, heater/light on) 230 VAC, 50 Hz, 0.2A (fan low, heater/light off); 1.5A (fan high, heater/light on)
<b>Discharge</b>	3.0 sec @ 18" center blower position; fan high-no diffusers (1000-100V) <sup>1</sup>
<b>Balance</b>	0 ±5V @ 18" from blower face
<b>Ion Emission</b>	AC Ionization
<b>Coverage</b>	2' x 4' area
<b>Cleanroom Class</b>	Meets ISO 14644-1 Class 5; Fed std. 209E Class 100
<b>Emitter Points</b>	Stainless Steel
<b>Controls</b>	Fan speed control knob BLOWER ON; on/off switch HEATER & TASK LIGHT
<b>Indicator Lights</b>	Orange IONIZATION STATUS; orange within on/off switches HEATER & TASK LIGHT
<b>Air Volume</b>	150-300 cfm (low to high), combined 3-fan output
<b>Heated Air Temp</b>	25°F (14°C) fan low; 11°F (6°C) fan high measured @ 6" in front of center fan above ambient;
<b>Audible Noise</b>	50 dBA fan low; 60 dBA fan high
<b>Operating Env.</b>	Temperature 32-122°F (0-50°C); humidity 30-70% RH, non-condensing
<b>Ozone</b>	0.02 ppm, measured @ 12" in front of unit <sup>2</sup>
<b>Lamp</b>	13W twin tube, compact fluorescent, 1650 lumen total task light output
<b>Air Filter</b>	30 ppi open cell polyurethane foam (optional)
<b>Mounting</b>	Adjustable brackets and S-hooks provided
<b>Enclosure</b>	Powder-coated white enamel aluminum
<b>Weight</b>	16 lb (7.3 kg)
<b>Dimensions</b>	42.75W x 4H x 6.75D in. (108.6 x 10.2 x 17.1 cm)
<b>Warranty</b>	Two year limited warranty
<b>Certifications</b>	RoHS Compliant  230V, 50 Hz  120V, 60 Hz

1. Tested in accordance with ANSI/ESD STM3.1-2006.

2. Test conducted in accordance with EPS EQQA-9577-019 using Dashibi Ozone Monitor Model 1003AH.


## Ordering Information

<b>4004063</b>	Aerostat Guardian, 120V, 60 Hz, UL, North America
<b>4005306</b>	Aerostat Guardian (no diffusers), 120V, 60 Hz, UL, North America
<b>4004261</b>	Aerostat Guardian, 230V, 50 Hz, CE, Continental Europe
<b>4009890</b>	Aerostat Guardian, 230V, 50 Hz, CE, United Kingdom
<b>4710017</b>	Aerostat Guardian Air Filter Retainer (1 per fan required)
<b>4100810</b>	Aerostat Guardian Air Filter Pack (6 filters)
<b>4610811</b>	Aerostat Guardian Task Light Fluorescent Lamp, 13W (2 per blower)


**Distributed by:**  
**All-Spec Industries**  
 Ph: 800-537-0351  
 Fx: 800-379-9903  
 Email: [sales@all-spec.com](mailto:sales@all-spec.com)  
 Web: [www.all-spec.com](http://www.all-spec.com)

## Emitter Point Cleaner


The Aerostat Guardian features a built-in emitter point cleaner for each fan. Using the emitter point cleaner takes only seconds. Cleaning the emitter points prevents the build-up of airborne debris. This keeps your Aerostat Guardian working in top form for the life of the unit.



## Discharge Times Performance

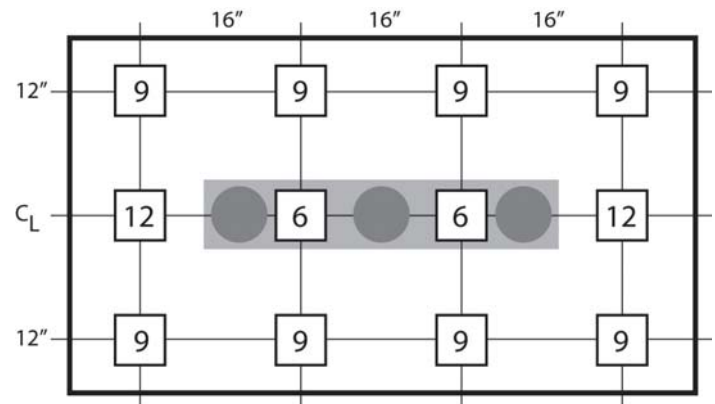

Discharge time in seconds (1000-100V), fan speed set to high. Guardian blower 18" from CPM measuring plate. CPM test plate 1" from table. Discharge times slightly longer for 230 VAC, 50 Hz unit.

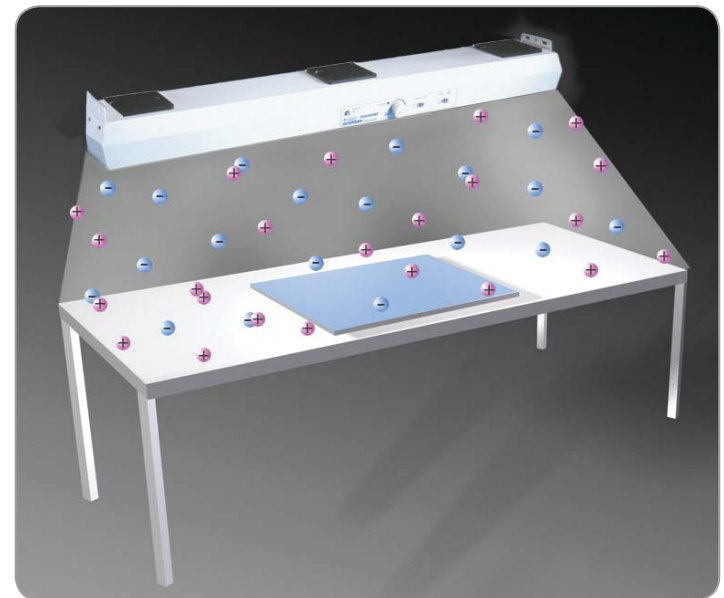

Overhead Ionization application

**SIMCO ION**™  
 An ITW Company

DS-AeroStat Guardian 5200635\_V1 - 06/12  
 © 2012 Simco-Ion  
 All rights reserved.

## Simco-Ion

Technology Group  
 1750 North Loop Rd., Ste 100  
 Alameda, CA 94502  
 Tel: 800.367.2452 (in USA)  
 Tel: 510.217.0600  
 info@simco-ion.com  
 www.simco-ion.com